
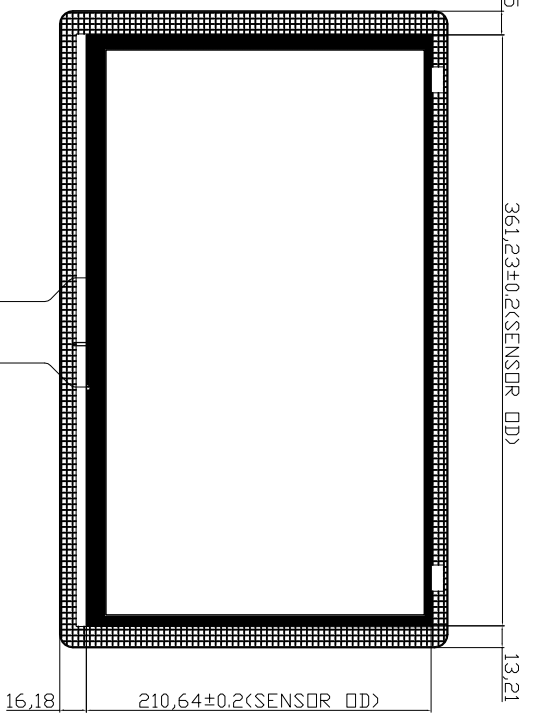
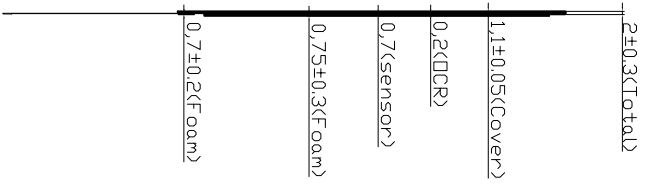


No ROHS hazardous material

| Ordinal | Modify content description | Cartographer/date of change |
|---------|----------------------------|-----------------------------|
| Δ | | |
| Δ | | |

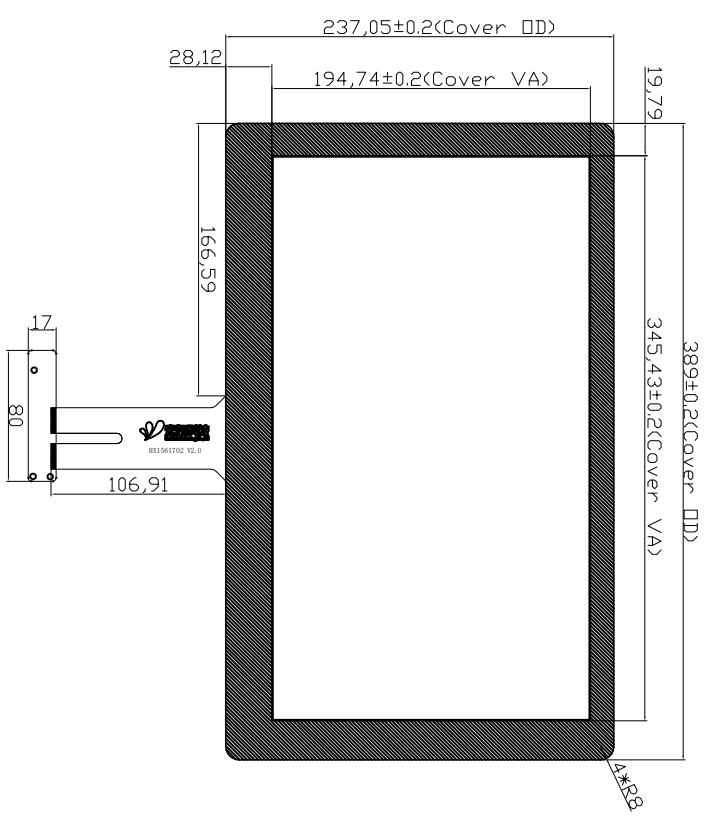

Screen printing area: Print Black

Frame adhesive foam area = 0.75mm

Frame adhesive area = 0.7mm

Front view

Side view

Back view

Technical parameters

| | | | |
|-----------------------|---|----------------------------------|-------------------|
| 1. Interfaces: | USB | 7. Humidity range: | 45~85%RH |
| 2. Structure : | G+G | 8. Transmittance: | ≥85% |
| 3. IC solutions: | ILI2302M | 9. Surface hardness: | ≥6H |
| 4. Impact resistance: | 30000A, 5000A, 5000A, 5000A, 5000A, 5000A | 10. Operate : | -20℃~+70℃, ≤85%RH |
| 5. Touch points: | 10 points | 11. Storage : | -30℃~+80℃, ≤85%RH |
| 6. Power supply: | 5V | 12. Unmarked dimension tolerance | as ±0.5 |

USB Connector (J1)


| | |
|---|----------|
| 1 | VCC (5V) |
| 2 | DN |
| 3 | DP |
| 4 | GND |



杭州宏梟科技有限公司
GrahHowlet Technology CO., Ltd

| Model | Version | Designer | Jeason | Approved | HBZ | Date | 2017-7-28 | Proportion | 1:1 |
|-----------|---------|----------|--------|----------|-----|------|-----------|------------|-----|
| HX1501704 | V2.0 | | | | | | | | |

view direction



Unit MM